

## EOS Window Awning

### Autonomous Exterior Shading

Reduce energy consumption and save on utility costs with fully automated EOS retractable window awnings.

- Expansive fabric options from Sunbrella<sup>®</sup>
- Simple to use technology and stylized to blend with your home
- Automatic operation: opens with daylight, closes when it becomes dark
- Mobile app intergration



### Product Parts

**Case** - 6063 painted aluminum


**Mounting plate** - 6063 extruded aluminum with french cleat for easy hanging

**Fabric** - Durable solution dyed acrylic

**Arms** - A380 alloy aluminum castings

**Electronics** - Integrated battery, solar panel and Bluetooth<sup>®</sup> controls

### Technology

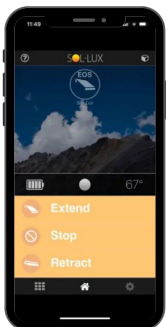

Sol-Lux awnings integrated Lithium Iron Phosphate battery (LiFePO<sub>4</sub>) has higher cycle life, better high-Temp performance and faster charging. Bluetooth<sup>®</sup> connectivity with Sol-Lux mobile app is standard.

### Product Options



Cassette case is available in 192 colors



Available in 1/2" increments from 39" to 120" to fit a wide variety of window openings



Auxillary solar panel if current mounting does not allow integrated solar panel exposure to the sun

### Fabric Options


We are proud to offer extensive color options from **Sunbrella<sup>®</sup>**.

For current Acrylic fabric options, please look at our full selection at [Sol-Lux.com/fabrics](https://www.sol-lux.com/fabrics).

**Upgrade Your Outdoor Living**

Visit [Sol-Lux.com](https://www.sol-lux.com) to Learn More About EOS

## EOS Product Specifications

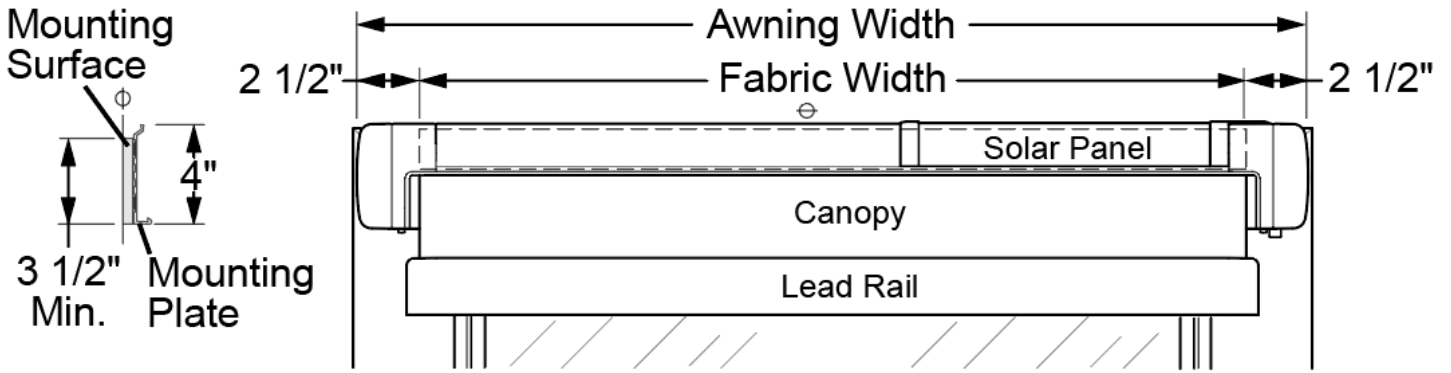

### Awning Width

39inch to 120inch in 1/2inch increments



### Fabric Extension

30inch (measured from cassette to lead rail)


### Canopy Pitch

45° Fixed (angle the canopy slopes down)

## EOS Installation

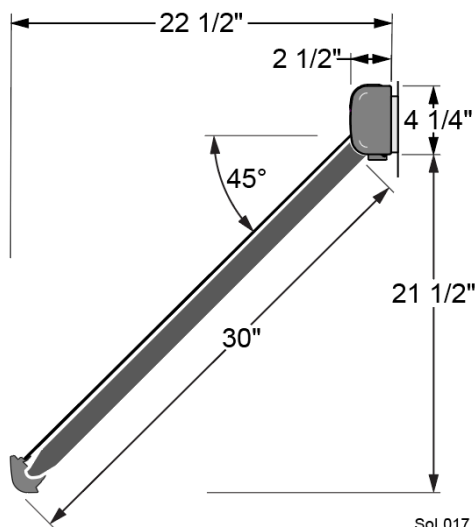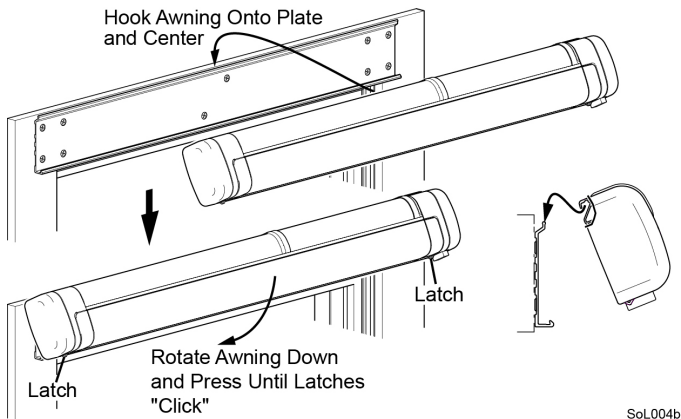

## Auxiliary Solar Panel Installation

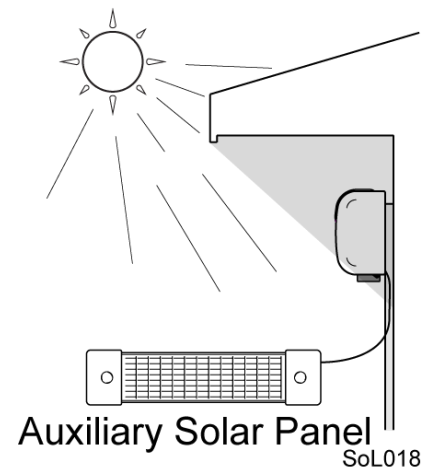

## EOS Resources

Visit [Sol-Lux.com/products/eos](https://www.sol-lux.com/products/eos) for a complete installation manual and the Sol-Lux Mobile App User Guide.